



# Lumina I



## High Power Output

Solarspace efficient cells with MBB and high-density encapsulation ensures higher power output



## High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



## More Power Generation

Gallium doped wafers reduce annual power degradation, optimized circuit design ensures more power generation under shading



## Great Adaptability

Sensible dimension design suitable for all scenarios

**SolarSpace Technology Co., Ltd.** was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 58.75GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

\*Please refer to SolarSpace for details

## SS7-72HS

## 540-560M


### Mono-Facial Module

# 560W

Maximum Power Output

# 21.68%

Maximum Module Efficiency

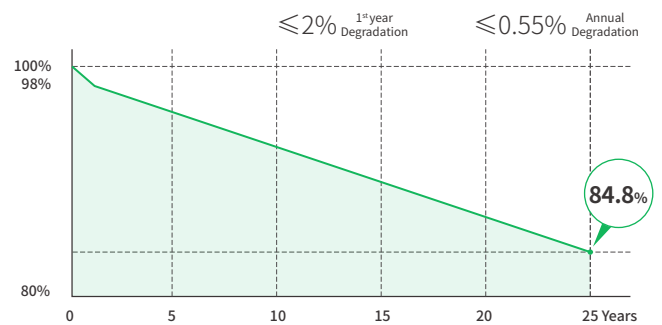

**12** Years Product Warranty **25** Years Linear Power Warranty

### Comprehensive Certificates

- IEC61215
- IEC61730
- IEC61701: Salt mist corrosion test
- IEC62716: Ammonia corrosion test
- IEC60068: Dust and Sand test
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



**Electric Characteristics (STC)**

Module Type	SS7-72HS -540M	SS7-72HS -545M	SS7-72HS -550M	SS7-72HS -555M	SS7-72HS -560M
Maximum Power (Pmax) [W]	540	545	550	555	560
Open-Circuit Voltage (Voc)[V]	49.61	49.76	49.91	50.03	50.15
Maximum Power Voltage (Vmp) [V]	41.65	41.81	41.97	42.15	42.33
Short-Circuit Current (Isc)[A]	13.85	13.92	14.02	14.07	14.14
Maximum Power Current (Imp) [A]	12.97	13.04	13.10	13.17	13.23
Module Efficiency	20.90%	21.10%	21.29%	21.48%	21.68%

Irradiation 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

**Temperature coefficients**


Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.265%/°C
Temperature coefficient of Pmax	-0.335%/°C
NMOT	45±2°C

**Electric Characteristics (NMOT)**

Module Type	SS7-72HS -540M	SS7-72HS -545M	SS7-72HS -550M	SS7-72HS -555M	SS7-72HS -560M
Maximum Power (Pmax) [W]	408	412	416	420	424
Open-Circuit Voltage (Voc)[V]	46.43	46.55	46.68	46.84	46.98
Maximum Power Voltage (Vmp) [V]	39.00	39.21	39.44	39.67	39.89
Short-Circuit Current (Isc)[A]	11.10	11.13	11.18	11.22	11.27
Maximum Power Current (Imp) [A]	10.47	10.51	10.55	10.59	10.63

Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5

**Engineering Design**

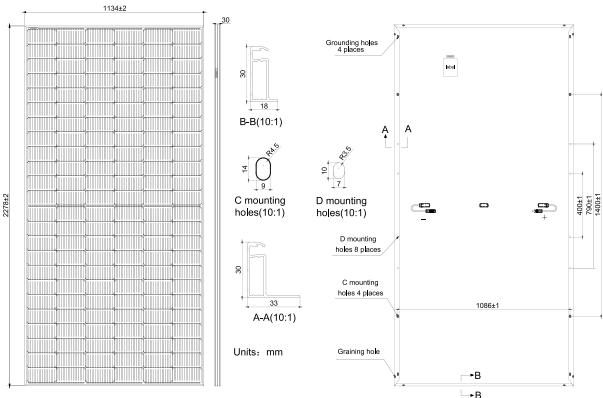


**Mechanical Characteristics**


Cell Type	Mono PERC (M10)
Number of Cells	144(6x24)
Dimensions	2278X1134X30mm
Weight	27.5kg
Glass	Single glass, 3.2mm coated tempered glass
Frame	Silver, Anodized Aluminum Alloy
Output Cables	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm (including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 or MC4 Compatible
Packaging	36 Pieces/Pallet, 720 pieces/40' container

**Characteristics**

I-V/P-V Curve at Different Irradiation  
SS7-72HS -550M



I-V Curve at Different Temperature  
SS7-72HS -550M

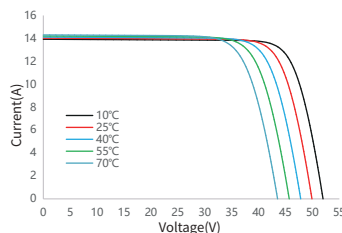

**Operating Conditions**

Maximum System Voltage	1500V DC
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa

