



# Lumina II



## Super Power Output

SolarSpace advanced TOPCon cells combined with MBB and high-density encapsulation provides ultra-high power output



## High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



## Extra power generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1<sup>st</sup> year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



## High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

**SolarSpace Technology Co., Ltd.** was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 58.75GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

\*Please refer to SolarSpace for details

## SS8-72HD

## 570-595N


N-TOPCon Bifacial Dual Glass Module

# 595W

Maximum Power Output

# 23.03%

Maximum Module Efficiency

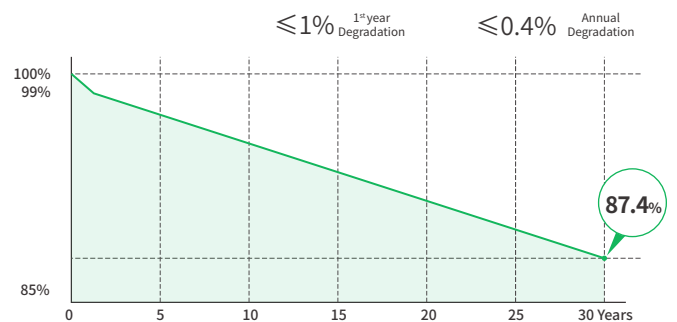

**15** Years Product Warranty **30** Years Linear Power Warranty

### Comprehensive Certificates

- IEC61215 • IEC61730
- IEC61701: Salt mist corrosion test • IEC62716: Ammonia corrosion test
- IEC60068: Dust and Sand test
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



**Electric Characteristics (STC)**

Module Type	SS8-72HD	SS8-72HD	SS8-72HD	SS8-72HD	SS8-72HD	SS8-72HD
	-570N	-575N	-580N	-585N	-590N	-595N
Maximum Power (Pmax) [W]	570	575	580	585	590	595
Open-Circuit Voltage (Voc)[V]	51.08	51.28	51.48	51.68	51.88	52.08
Maximum Power Voltage (Vmp) [V]	42.29	42.44	42.59	42.77	42.92	43.06
Short-Circuit Current (Isc)[A]	14.24	14.30	14.36	14.42	14.48	14.54
Maximum Power Current (Imp) [A]	13.48	13.55	13.62	13.68	13.75	13.82
Module Efficiency	22.07%	22.26%	22.45%	22.65%	22.84%	23.03%

Irradiation 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

**Electric Characteristics (NMOT)**

Module Type	SS8-72HD	SS8-72HD	SS8-72HD	SS8-72HD	SS8-72HD	SS8-72HD
	-570N	-575N	-580N	-585N	-590N	-595N
Maximum Power (Pmax) [W]	429	433	437	441	445	449
Open-Circuit Voltage (Voc)[V]	48.51	48.70	48.89	49.08	49.27	49.46
Maximum Power Voltage (Vmp) [V]	39.62	39.73	39.84	39.95	40.06	40.17
Short-Circuit Current (Isc)[A]	11.50	11.55	11.59	11.64	11.69	11.74
Maximum Power Current (Imp) [A]	10.83	10.90	10.97	11.04	11.11	11.18

Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5


**Bifacial Output-Rearside Power Gain (575 W)**

Power Gain	5%	10%	15%	20%	25%
Maximum Power (Pmax) [W]	604	633	662	690	719
Open-Circuit Voltage (Voc)[V]	51.20	51.20	51.20	51.30	51.30
Maximum Power Voltage (Vmp) [V]	42.82	42.82	42.82	42.83	42.83
Short-Circuit Current (Isc)[A]	14.74	15.30	15.84	16.41	16.97
Maximum Power Current (Imp) [A]	14.11	14.78	15.46	16.12	16.79

**Temperature coefficients**

Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.260%/°C
Temperature coefficient of Pmax	-0.290%/°C
NMOT	45±2°C

**Engineering Design**

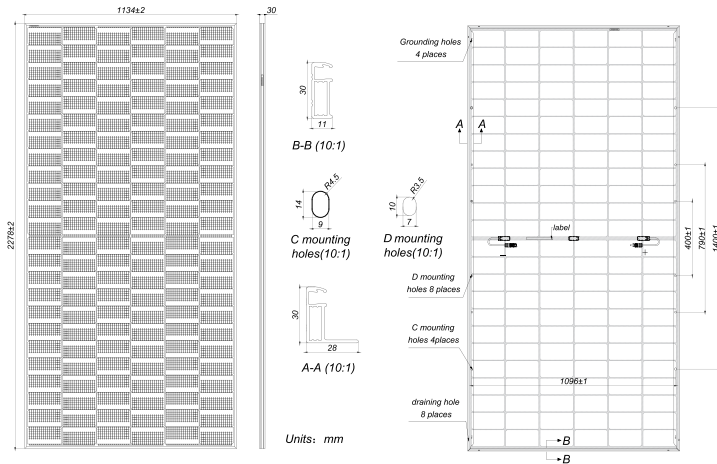


**Mechanical Characteristics**


Cell Type	N-TOPCon
Number of Cells	144(6x24)
Dimensions	2278X1134X30mm
Weight	31.2kg
Glass	Front Glass, 2.0mm AR coated semi-tempered glass Back Glass, 2.0mm glazed semi-tempered glass
Frame	Silver, Anodized Aluminum Alloy
Output Cables	4mm <sup>2</sup> (IEC),12AWG(UL), 300mm (including connector) or 1200mm(including connector) Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 or MC4 Compatible
Packaging	36 Pieces/Pallet, 720 pieces/40' container

**Characteristics**

I-V/P-V Curve at Different Irradiation  
SS8-72HD-575N

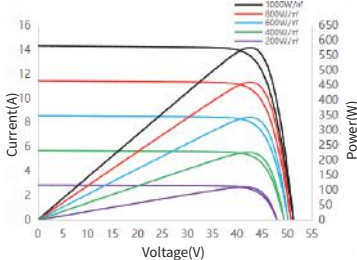

I-V Curve at Different Temperature  
SS8-72HD-575N



**Operating Conditions**

Maximum System Voltage	1500V DC(IEC)
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Bifaciality	80±10%

