



Lumina II



High Power Output

With 210 large wafer technology and slicing technology, multi-grid technology, high-density module packaging to ensure higher power output of modules



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



Extra power generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1st year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 58.75GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

*Please refer to SolarSpace for details

SS9-66HDB 685-705N


N-TOPCon Bifacial Dual Glass Module

705W

Maximum Power Output

22.70%

Maximum Module Efficiency

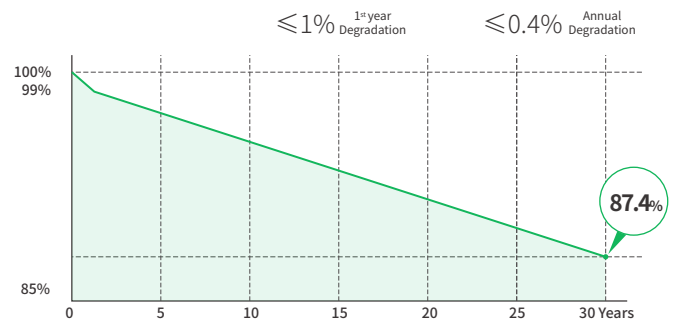

15Years Product Warranty **30**Years Linear Power Warranty

Comprehensive Certificates

- IEC61215 • IEC61730
- IEC61701: Salt mist corrosion test • IEC62716: Ammonia corrosion test
- IEC60068: Dust and Sand test
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



Electric Characteristics(STC)

Module Type	SS9-66HDB	SS9-66HDB	SS9-66HDB	SS9-66HDB	SS9-66HDB
	-685N	-690N	-695N	-700N	-705N
Maximum Power (Pmax) [W]	685	690	695	700	705
Open-Circuit Voltage (Voc)[V]	47.90	48.10	48.30	48.50	48.70
Maximum Power Voltage (Vmp) [V]	39.90	40.10	40.30	40.50	40.70
Short-Circuit Current (Isc)[A]	18.20	18.24	18.28	18.32	18.36
Maximum Power Current (Imp) [A]	17.18	17.21	17.25	17.29	17.33
Module Efficiency	22.05%	22.21%	22.37%	22.53%	22.70%

Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5

Bifacial Output-Rearside Power Gain ^(695W)

Power Gain	5%	10%	15%	20%	25%
	Maximum Power (Pmax) [W]	730	765	799	834
Open-Circuit Voltage (Voc)[V]	47.90	47.90	47.90	48.00	48.00
Maximum Power Voltage (Vmp) [V]	40.30	40.30	40.30	40.40	40.40
Short-Circuit Current (Isc)[A]	18.84	19.56	20.25	20.98	21.69
Maximum Power Current (Imp) [A]	18.12	18.99	19.83	20.65	21.51

Electric Characteristics (NMOT)


Module Type	SS9-66HDB	SS9-66HDB	SS9-66HDB	SS9-66HDB	SS9-66HDB
	-685N	-690N	-695N	-700N	-705N
Maximum Power (Pmax) [W]	522	526	530	534	538
Open-Circuit Voltage (Voc)[V]	45.10	45.30	45.50	45.70	45.90
Maximum Power Voltage (Vmp) [V]	37.20	37.40	37.60	37.80	38.00
Short-Circuit Current (Isc)[A]	14.68	14.72	14.76	14.80	14.84
Maximum Power Current (Imp) [A]	14.04	14.07	14.10	14.13	14.16

Irradiance 800 W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5

Temperature coefficients

Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.260%/°C
Temperature coefficient of Pmax	-0.290%/°C
NMOT	45 ± 2°C


Engineering Design

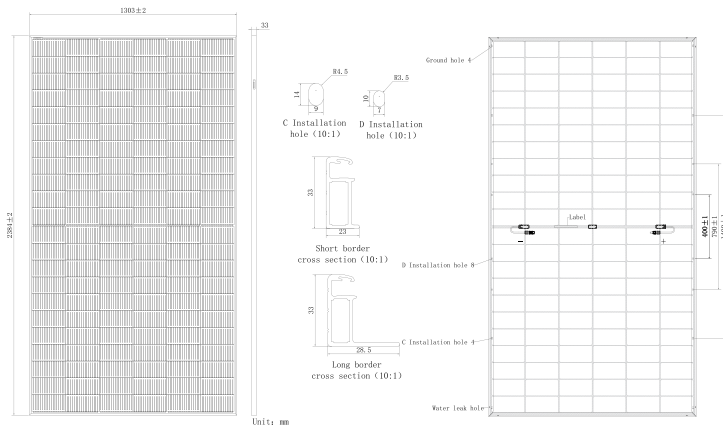

Mechanical Characteristics

Cell Type	N-TOPCon
Number of Cells	132(6x22)
Dimensions	2384X1303X33mm
Weight	37.5kg
Glass	Front glass, 2.0mm coated semi-tempered glass Back Glass, 2.0mm glazed semi-tempered glass
Frame	Black, Anodized Aluminum Alloy
Output Cables	4mm ² (IEC),12AWG(UL) 300mm(including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 or MC4 Compatible
Packaging	33 Pieces/Pallet, 594 pieces/40' container

Characteristics

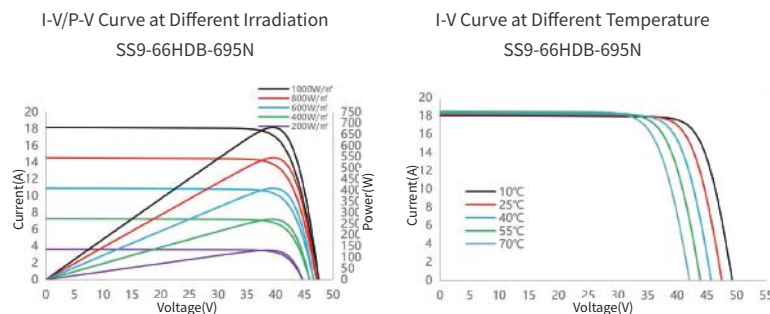

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Bifaciality	80 ± 10%